



#### Agenda for today

- 14h00-14h15: welcome and general introduction
- 14h15-14h45: future energy supply and demand
  - Deep-dive on analysis (15min)
  - Questions (15min)
- 14h45-15h15: flexibility
  - Deep-dive on analysis (15min)
  - Questions (15min)
- 15h15-15h40: adequacy
  - Deep-dive on analysis (10min)
  - Questions (15min)
- 15h40-15h55
  - Focus points (10min)
  - Questions (5min)
- 15h55-16h00: closing remarks





#### Today's speakers





#### Jan Voet

Manager System of the Future at Elia Group



#### **Louis Magein**

Market & Adequacy analyst at Elia Transmission Belgium

#### Rafael Feito-Kiczak

Manager Scenarios, Market & Adequacy Analysis at Elia Transmission Belgium



#### **Carsten Bakker**

Market analyst at Elia group







#### How to interact?

#### The presentation is divided into 3 blocks:

- Future energy supply and demand
- Flexibility
- Adequacy

During the presentation of every block (and after during the Q&A), you will get the chance to ask questions using the **slido** application. You can join via **the link** in the chat or via the code below.

Please keep the questions on topic and focused on the dedicated block.

You can join at **slido.com** with **#193256** 









#### Each year, Elia Group publishes a study on its stakeholders day on a topic of great relevance to society



2018: Consumer-centricity



2019: Preparing the power system 2030



2020: E-mobility



2021: Climate neutral European energy system





#### Making the Green Deal a reality

Dimensions of our study




Our study envisions a fully climate neutral system by 2050 in Europe with focus on Belgium and Germany.





Our study uses 'state-of-the-art' methodologies to simulate and analyse the energy/electricity system. Several sensitivities were performing allowing to assess the impact of key assumptions

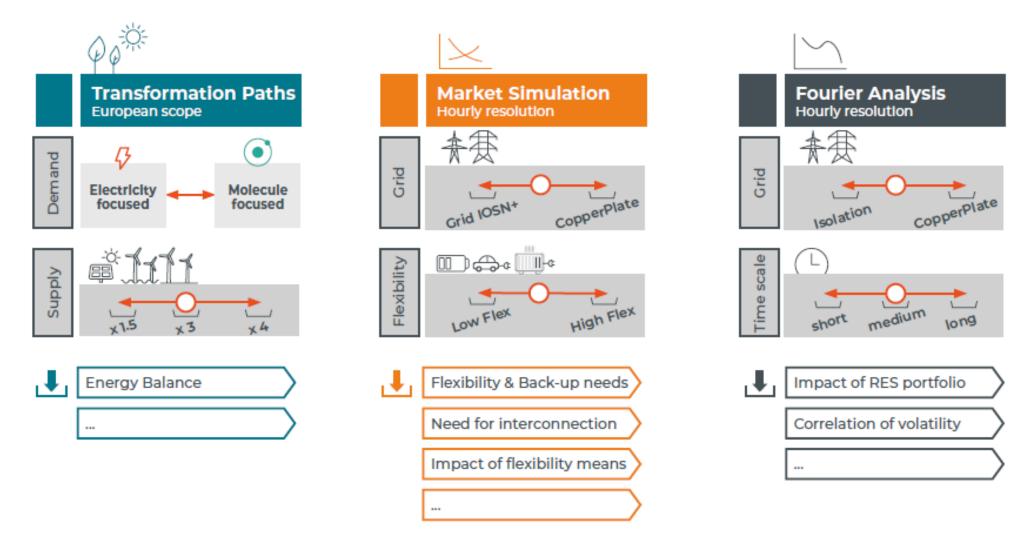

#### **Key Insights on the Energy Balance**




# Europe is short on the renewables it needs to achieve net zero by 2050

- Sufficient RES to cover direct electrification needs.
- Imports of green molecules from other continents will be required.






## Direct electrification is the most efficient way to cover final energy demand.

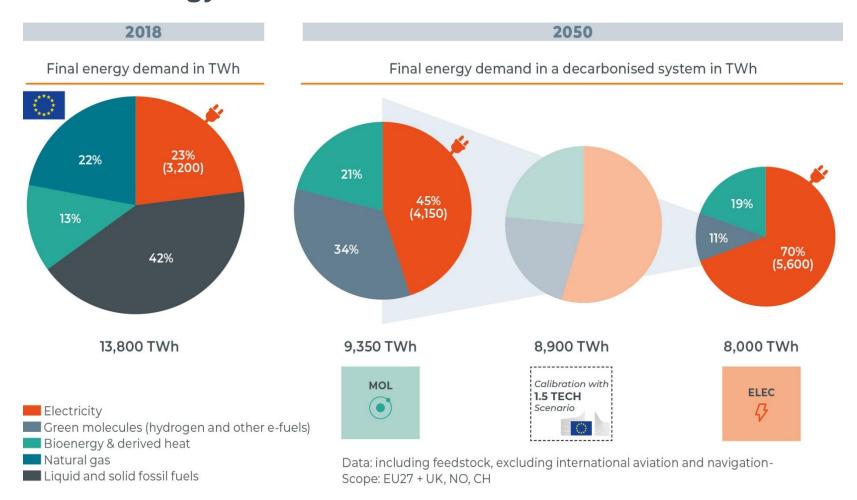



#### Overview of key scenario assumptions regarding direct electrification

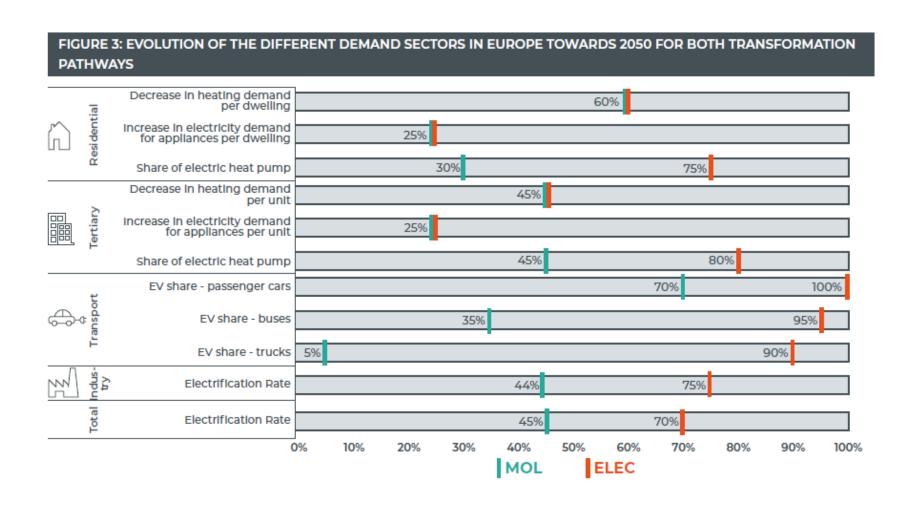






## Europe has sufficient RES potential, but deployment of renewables needs to accelerate for the next three decades to decarbonize energy supply





## The uneven distribution of renewable energy across Europe make interconnectors essential tools for electrification and decarbonisation.

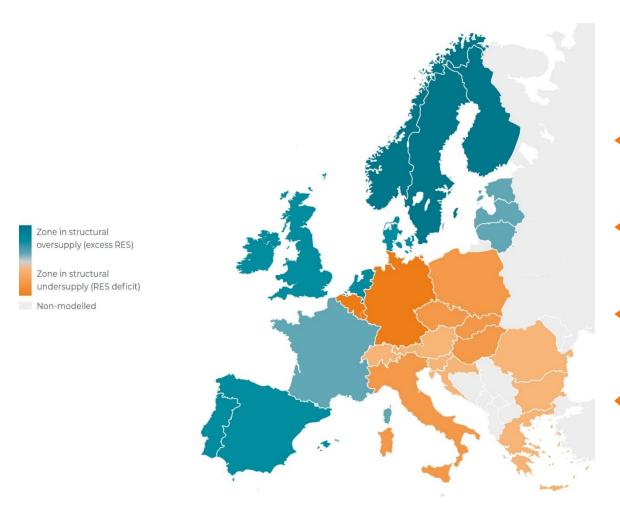

The over- and undersupply of direct electricity using regional resources and demand.

The renewable energy potential is **unevenly distributed over Europe**.

Largest potentials are in the **Nordics** and along the **west coast of Europe** 

Undersupply for both Belgium and Germany.







### Even if domestic RES is exploited to the max, Belgium needs significant non-domestic RES to cover its electricity demand.





#### **Energy balance: Key figures**

#### **Direct Electrification**

is most efficient to meet final energy demand.



Difference in annual electricity needs (incl. indirect needs to generate green molecules) between electricity vs molecule focused transformation pathway

A large increase in the speed of RES exploitation is needed in order to supply all the energy by 2050



#### **RES** expansion

needs accelerate quickly.

#### **Close Cooperation in Europe**

to pool excess with shortage regions.



BE to employ non-domestic RES for half of its direct electricity demand. DE only self sufficient in most ambitious RES expansion scenario. Limited potential for domestic hydrogen production.

Key insights







#### Questions

#### **Key Insights on Flexibility**




## A well-designed RES system will be able to manage the fluctuations in an efficient way:

- Seasonality → well balanced RES mix
- Mid-term fluctuations -> more interconnectors
- Daily fluctuations → electrification of end use



#### Our flexibility toolbox contains 4 elements to balance the future power system

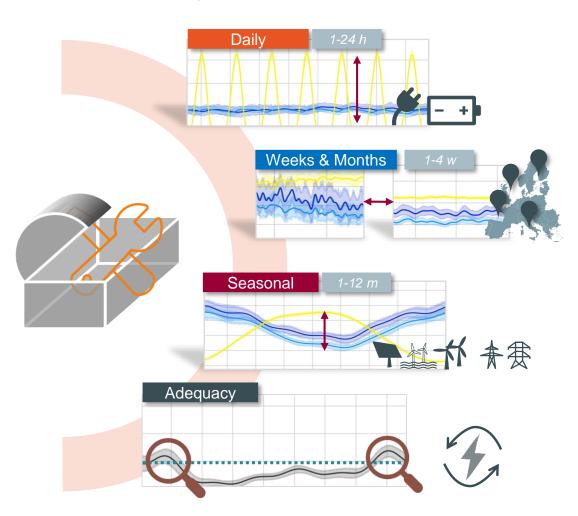

Daily volatility is mainly driven by PV and addressed with High End-user flexibility.

Weekly & Monthly variations of wind are mitigated via geographical distribution

Seasonality of residual load can be addressed by a good balanced RES mix and interconnection.

Backup capacity to cover limited periods of low RES infeed. No season long need in European mix/ system.








#### Mix matters: a balanced RES mix reduces seasonality to a minimum.

#### Seasonal RES-availability with a balanced RES mix

Lines show mean, shades show variability of climate years

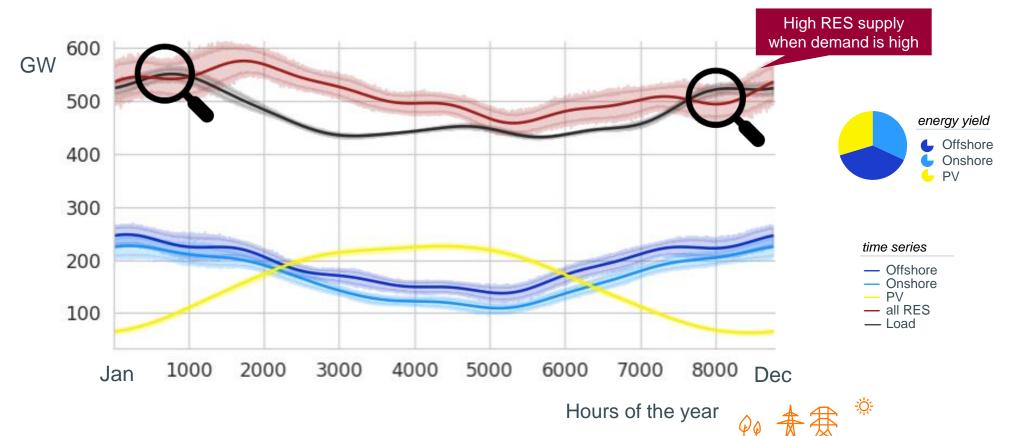


Scenario: demand ELEC + supply RES 3xBAU

Scope: EU27 + UK, NO, CH




#### Electricity supply in 2050 in Belgium

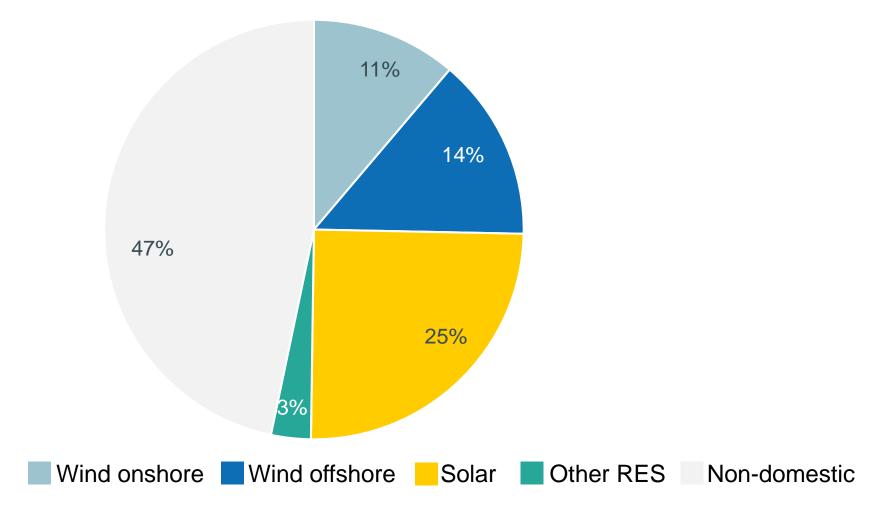






## Two theoretical scenarios to cover Belgium's gap for direct electricity demand: wind energy aligns best with needs.

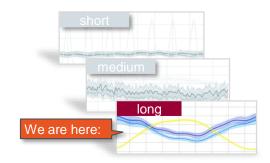

#### Long term residual load volatility

Lines show mean, shades show variability of climate years

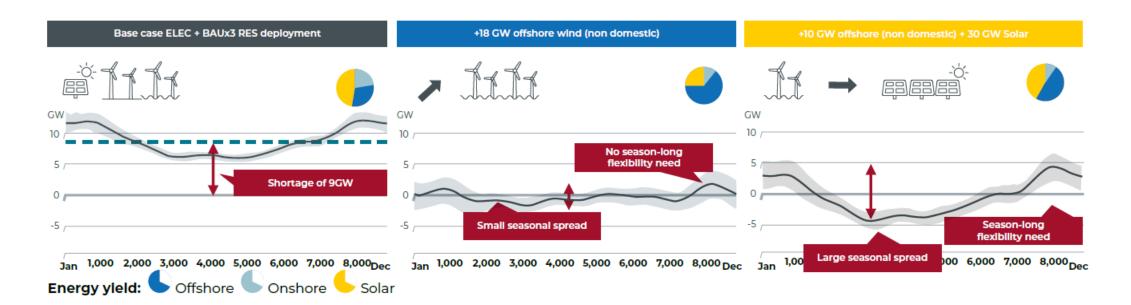






Interconnection not only to share RES potential, but also to reduce flexibility needs.

Weekly volatility of **offshore** wind in % of installed capacity

Covering p99.97

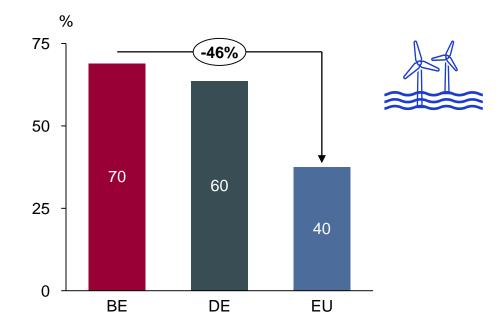




elia group




## Short-term flexibility allows to better integrate solar generation, mainly in summer and interseason.

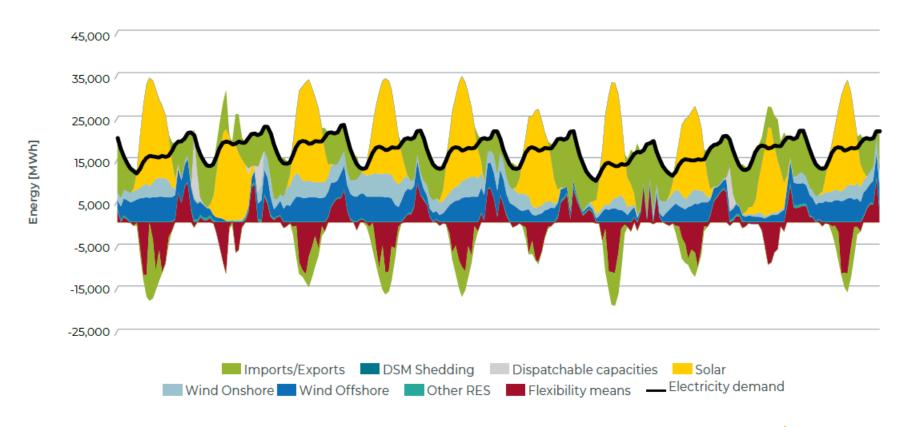






Electrified end-use provides valuable flexibility to the system. Digitalisation to unlock this potential.

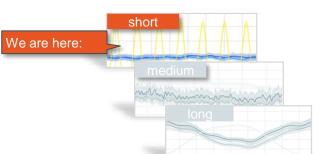

#### Distribution of days across the year in Germany

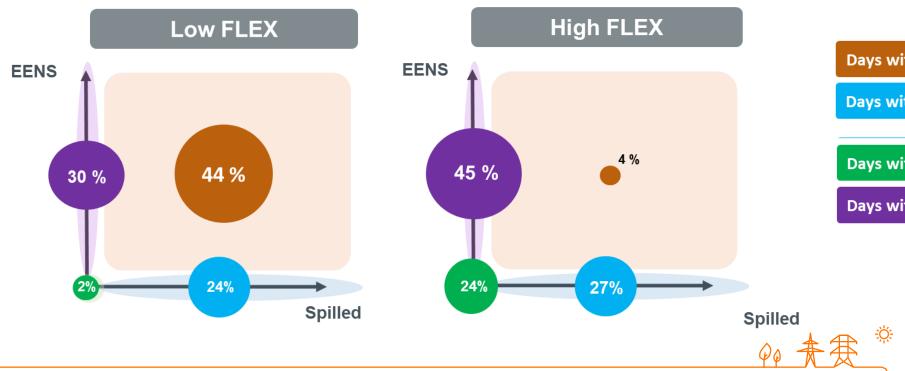

Days with over and under supply

Days with over supply but no under supply

Days with neither over nor under supply

Days with under supply but no over supply







#### Questions

#### **Key Insights on Adequacy**




A significant volume of 'dispatchable' capacity will be needed in 2050 to cover long periods with low RES supply and high demand.



#### Dispatchable capacities are needed to cover sustained periods of low RES infeed.

#### Load filling – summer period

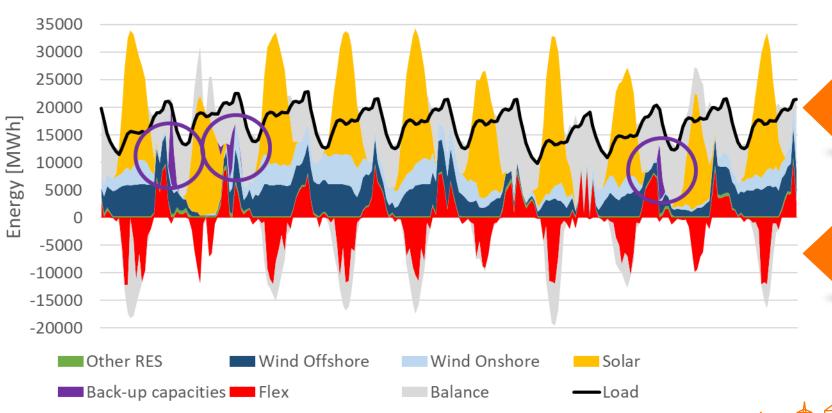


During periods with lower RES infeed with grid IoSN+, imports are more limited and flexibility provides less added value.

Back-up capacity are therefore needed in order to ensure an adequate system.





## Both different levels of end-use flexibility and interconnection reduce the need for back-up capacity.

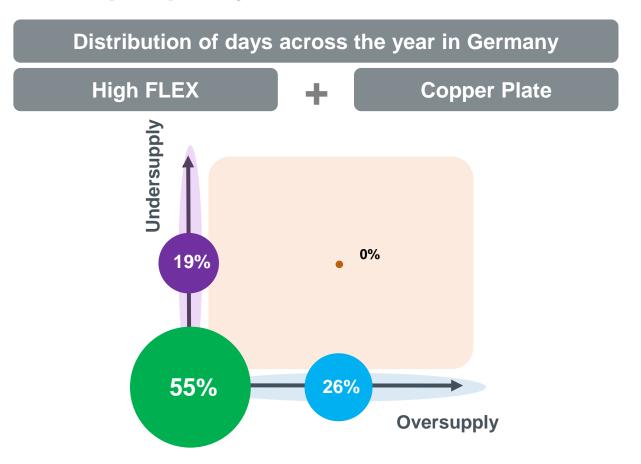

High flexibility and strong European interconnection reduces most of intraday variations and part of weekly variations.


However, undersupply periods (at least 1 hour) are still observed during 19% of the days.


Back-up capacity are required to ensure adequacy during those periods.





## Prolonged situations of low RES generation are characterised by local wind fluctuations during winter

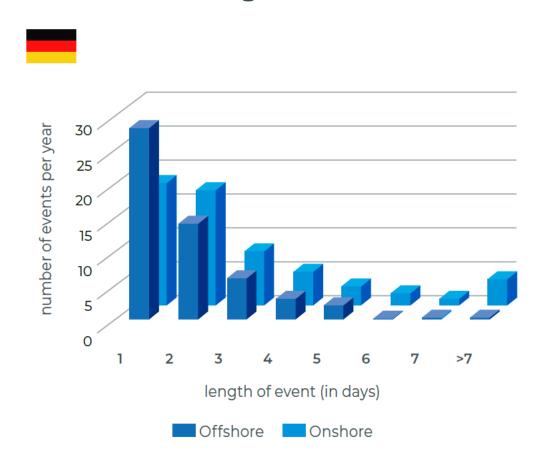

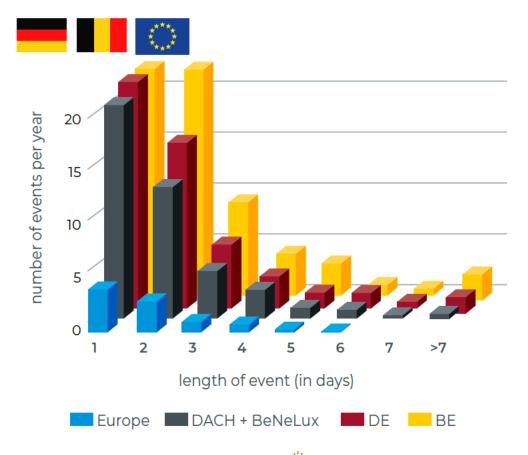








## The need for operating dispatchable back-up capacities can be strongly reduced by a balanced RES mix, sufficient interconnection and the availability of short term flexibility.

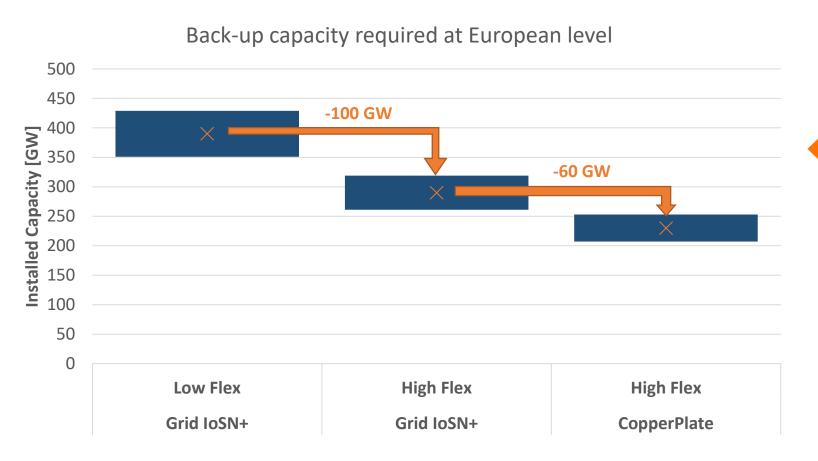

Capacity need can be reduced by about 40% in case of strong European interconnection and high end-user flexibility.



Estimated required back-up capacity: 7.5 - 15 GW








## Backup capacity is needed to cover periods of RES shortage that may last for several days, but there is no need for them to run continuously throughout all winter

#### Back-up generation on European level

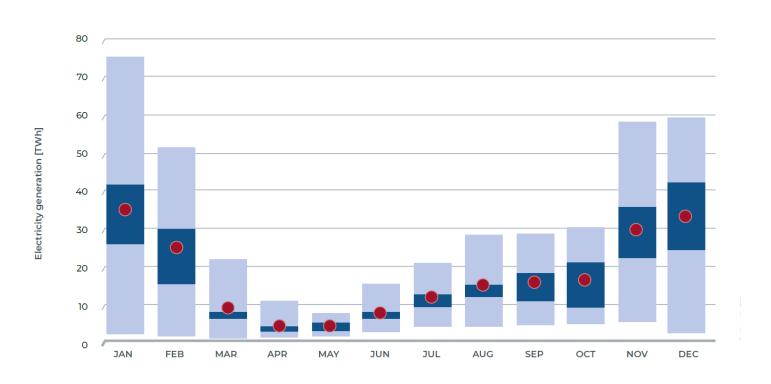



Spread (Monte-Carlo years)



Average (Monte-Carlo years)







#### Questions



Based on these insights, where do we need to put the focus?



#### Focus points for the coming years



To make optimal use of the continent's scarce capacity of RES, Europe needs to set up frameworks for partnerships between countries with different levels of RES potential



Policymakers at all institutional levels need to focus on measures that create the right investment framework and reduce the throughput time of RES expansion projects and the realisation of the necessary grid infrastructure



The electrification of mobility, heating and end-use appliances should be prioritised, as it is key for reaching climate neutrality. Electrification unlocks flexibility to facilitate the further integration of RES and reduces the final energy demand



The use of green molecules to replace grey hydrogen and decarbonise sectors where electrification is not an option is a priority





#### Questions



# What is next?

Next year Elia Group will do a zoom in on the energy transition of industry. There are three different use cases in focus:

- **1. Energy intensive industries**What is needed for the energy transition?
- 2. Data centers

  How can these centers to become carbon-neutral at any time?
- 3. Service/logistics centers

  How can they optimise all of their assets in order to decrease carbon emissions?

This is also an invitation to contact us at:

info@elia.be



## Thank you to everyone who gave feedback and contributed!















And many more...

